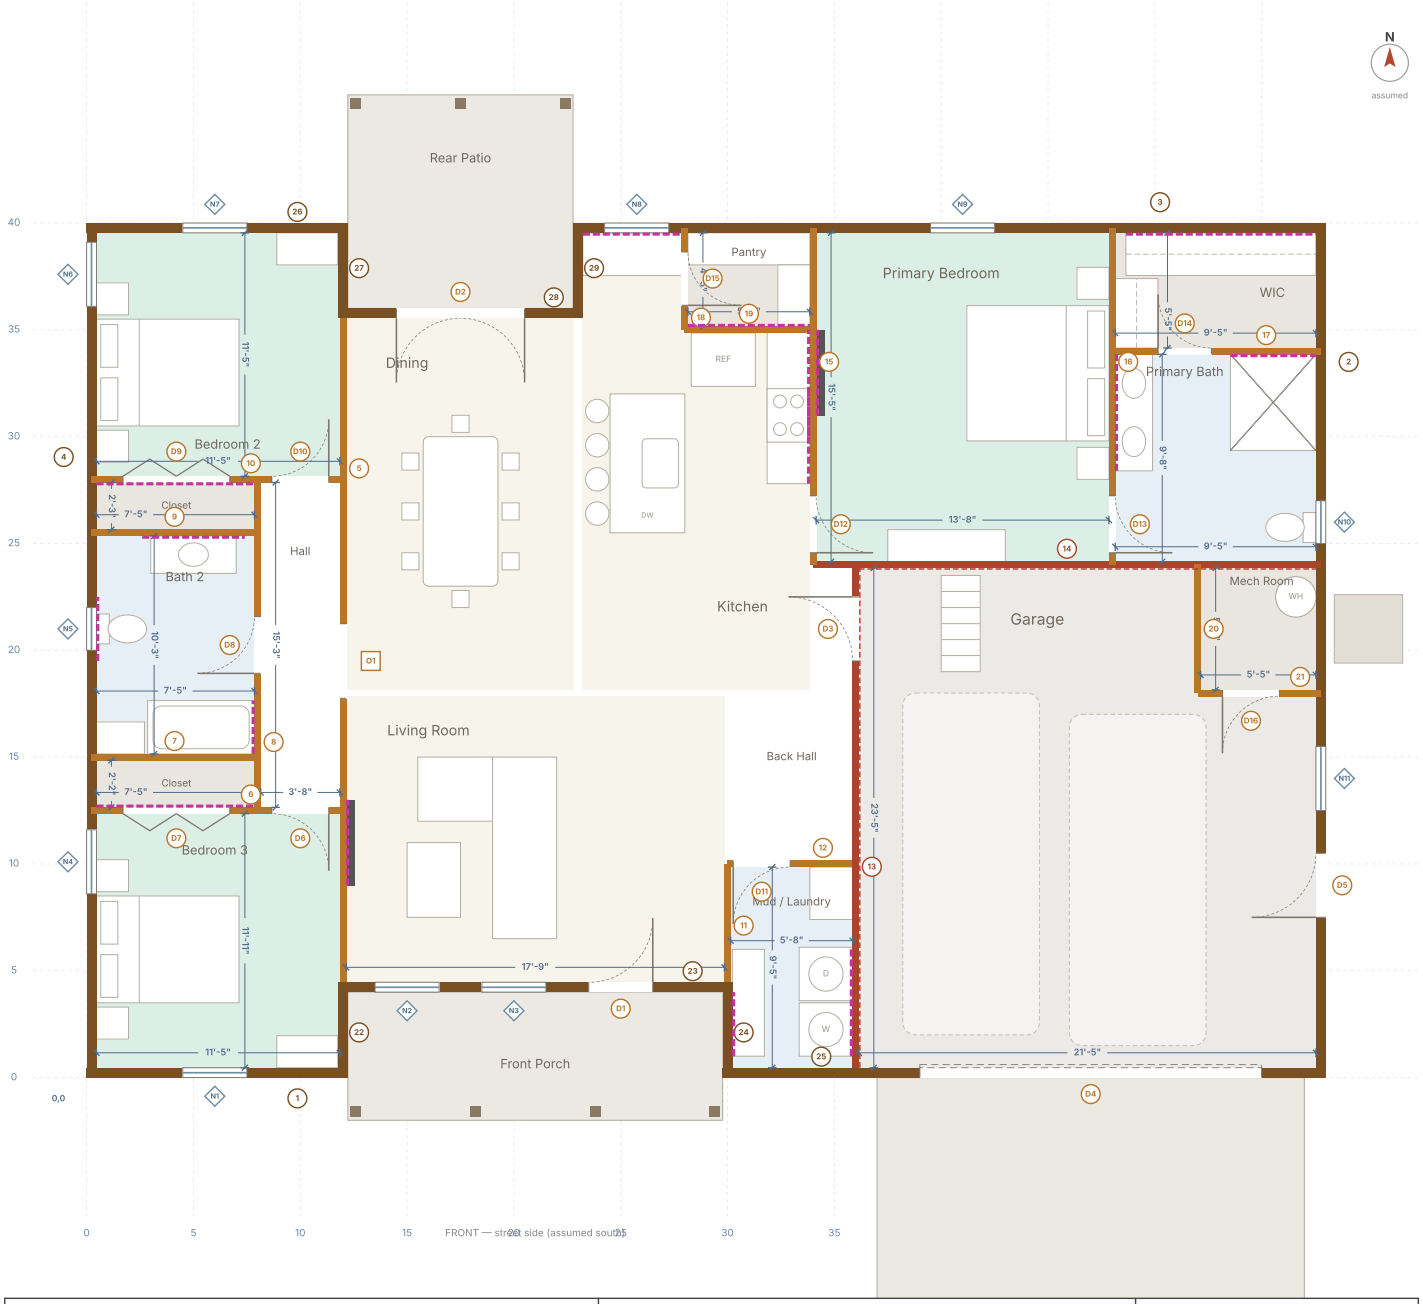


Waring Build

BuildWise plan 3933 · 3 bed, 2 bath · 1,800 sq ft + 528 sq ft garage · 58'-0" x 40'-0" framing
Slab on grade · 9' ceilings · 6:12 gable · grid 5', 0,0 at the south-west corner

Framing plan

Walls, door and window rough openings, headers, blocking
Schematic for pricing and coordination, not a stamped construction document. Verify on site.

S-1

rev
drawn for K. Christianson

S-1 Framing

exterior 2×6 @ 16" 2×4 partition @ 16" garage separation, gypsum on the garage side (red dash) blocking band window (diamond tag)

round tag: door; square tag: cased opening

Notes

1. Plan coordinates: x runs east from the outside face of the west wall framing, y runs north from the outside face of the front wall framing; the grid is 5'. The front of the house is drawn facing south: confirm the lot orientation.
2. Blue dimensions are each room's clear size, stud face to stud face: exterior walls to the inside face of the 2×6 studs, interior walls to the stud face 1-3/4" off the centre line.
3. Ceilings are 9'-0" flat throughout, including the garage, on 104-5/8" precut studs with a PT bottom plate and a double top plate.
4. The roof is a 6:12 gable, ridge east–west, with two front-facing gables as the front elevation: one over the porch and one over the garage. The main trusses clear-span 40' front to rear, so the front and rear walls bear and every interior wall is a partition; walls 2 and 4 are gable ends. The front gables are framed with valley sets on top of the main roof.
5. The porch and the patio are set 4' into the house: the walls step in around them (walls 22–24 at the porch, 27–29 at the patio), and the slab follows. The porch is 17'-6" x 6' (4' under the house roof, 2' under the porch gable on the beam and posts); the patio is 10'-6" x 10' (4' under the house roof, 6' under a shed).
6. Foundation: slab on grade, thickened edge or frost-protected stem wall to the local frost depth; 10-mil vapour retarder; R-10 under-slab perimeter insulation 4' in (IECC climate zone 6 assumed). Garage slab 4" below the house slab, sloped 1/8"/ft to the door.
7. Garage separation (R302.6): 1/2" gypsum on the garage side of walls 13 and 14, 5/8" Type X on the garage ceiling; D3 is 20-minute rated and self-closing. Seal every penetration in those walls.
8. Door rough openings: prehung interior 2" over the leaf width x 82-1/2"; exterior per the door maker. Window rough openings 1/2" over the unit size; heads at 8'-0".
9. Bedroom windows N1, N4, N6, N7 and N9 are egress windows: 5.7 sq ft clear opening, 20" min width, 24" min height, sill 44" max (R310). Choose a unit size that meets the clear opening.

Open items

The particulars to settle on this sheet.

- Orientation: the drawings assume the porch and garage door face south. Tell us the real compass direction and the sheets will turn.
- Bath 2 is drawn 7'-5" x 10'-2" clear: the BuildWise label says 5' x 11', which does not fit beside the 3'-8" hall. Keep, or rework the bedroom wing?
- Interior door height: 6'-8" drawn. 8'-0" doors suit 9' ceilings better (D6–D16, about $40–$90 more each).
- Primary bedroom door D12 opens off the kitchen corner, as on the plan; the garage keeps its full 22' width. Alternative: shift it to the back-hall alcove and narrow the garage to 21'.
- Porch and patio insets: drawn 4' deep, read from the BuildWise plan; the living room is 17'-8" x 13'-5" and the dining room 10'-7" x 17'-5" as a result. Confirm the depths, and whether the patio should sit wholly under the roof.
- Truss heel height and snow load: confirm the site ground snow load for the truss engineering and the bearing-wall headers.

Wall schedule

One row per wall. Click a row to find it on the plan.

Wall	Runs	Length	Framing	Openings	Notes
1	east–west, the front of Bedroom 3	12'-3"	2×6 @ 16" o.c., 7/16" OSB	N1	front exterior wall, Bedroom 3; bears the roof trusses
2	north–south, the east gable end	39'-1"	2×6 @ 16" o.c., 7/16" OSB	D5, N11, N10	east exterior wall (gable end)
3	east–west, the rear of the kitchen and primary suite	35'-3"	2×6 @ 16" o.c., 7/16" OSB	N8, N9	rear exterior wall, kitchen and primary suite; bears the roof trusses
4	north–south, the west gable end	39'-1"	2×6 @ 16" o.c., 7/16" OSB	N4, N5, N6	west exterior wall (gable end)

Wall	Runs	Length	Framing	Openings	Notes
5	north–south, front ext. wall to rear ext. wall; west face 3'-8" from W8	31'-1"	2×4 @ 16" o.c. partition	O1	bedroom wing / great room
6	east–west, west ext. wall to W5; south face 11'-11" from front ext. wall	11'-5"	2×4 @ 16" o.c. partition	D7, D6	Bedroom 3 / its closet and the hall
7	east–west, west ext. wall to W8; south face 2'-2" from W6	7'-5"	2×4 @ 16" o.c. partition	—	Bedroom 3 closet / Bath 2
8	north–south, W6 to W10; west face 7'-5" from west ext. wall	15'-2"	2×4 @ 16" o.c. partition	D8	closets and Bath 2 / hall
9	east–west, west ext. wall to W8; south face 10'-3" from W7	7'-5"	2×4 @ 16" o.c. partition	—	Bath 2 / Bedroom 2 closet
10	east–west, west ext. wall to W5; south face 2'-3" from W9	11'-5"	2×4 @ 16" o.c. partition	D9, D10	Bedroom 2 / its closet and the hall
11	north–south, front ext. wall to W12; west face 17'-9" from W5	5'-5"	2×4 @ 16" o.c. partition	—	living room / mud-laundry
12	east–west, W11 to W13; south face 9'-5" from front ext. wall	5'-9"	2×4 @ 16" o.c. partition	D11	mud-laundry / back hall
13	north–south, front ext. wall to W14; west face 23'-8" from W5	23'-5"	2×4 @ 16" o.c., R-13 batts	D3	house / garage
14	east–west, W15 to east ext. wall; south face 23'-5" from front ext. wall	23'-5"	2×4 @ 16" o.c., R-13 batts	—	primary suite / garage and back hall
15	north–south, W14 to rear ext. wall; west face 21'-8" from W5	15'-5"	2×4 @ 16" o.c. partition	D12	primary bedroom / kitchen and pantry
16	north–south, W14 to rear ext. wall; west face 13'-8" from W15	15'-5"	2×4 @ 16" o.c. partition	D13	primary bedroom / primary bath and WIC
17	east–west, W16 to east ext. wall; south face 9'-8" from W14	9'-5"	2×4 @ 16" o.c. partition	D14	primary bath / WIC
18	north–south, W19 to rear ext. wall; west face 4'-8" from W29	4'-5"	2×4 @ 16" o.c. partition	D15	pantry / kitchen
19	east–west, W18 to W15; south face 24'-8" from W12	5'-9"	2×4 @ 16" o.c. partition	—	pantry / kitchen
20	north–south, W21 to W14; west face 15'-8" from W13	5'-9"	2×4 @ 16" o.c., 1/2" gypsum both sides; PT bottom plate	—	mechanical room / garage
21	east–west, W20 to east ext. wall; south face 17'-5" from front ext. wall	5'-5"	2×4 @ 16" o.c., 1/2" gypsum both sides; PT bottom plate	D16	mechanical room / garage
22	north–south, the west side of the porch	3'-4"	2×6 @ 16" o.c., 7/16" OSB	—	porch west return, Bedroom 3 / front porch
23	east–west, behind the porch	18'-6"	2×6 @ 16" o.c., 7/16" OSB	N2, N3, D1	front wall behind the porch, living room; bears the roof trusses
24	north–south, the east side of the porch	3'-4"	2×6 @ 16" o.c., 7/16" OSB	—	porch east return, mud-laundry / front porch
25	east–west, the front of the laundry and garage	28'-3"	2×6 @ 16" o.c., 7/16" OSB	D4	front exterior wall, mud-laundry and garage; bears the roof trusses
26	east–west, the rear of Bedroom 2	12'-3"	2×6 @ 16" o.c., 7/16" OSB	N7	rear exterior wall, Bedroom 2; bears the roof trusses
27	north–south, the west side of the patio	3'-4"	2×6 @ 16" o.c., 7/16" OSB	—	patio west return, Bedroom 2 / rear patio
28	east–west, behind the patio	11'-6"	2×6 @ 16" o.c., 7/16" OSB	D2	rear wall behind the patio, dining; bears the roof trusses

Wall	Runs	Length	Framing	Openings	Notes
29	north–south, the east side of the patio	3'-4"	2×6 @ 16" o.c., 7/16" OSB	—	patio east return, kitchen / rear patio

Door schedule

Door	Room	Type	Size	Rough opening	In wall	Header	Notes
D1	Front entry	prehung swing	3'-0" x 8'-0"	38.5" x 97.5"	front ext. wall	2-2×8 with 2" XPS, 1 jack each end	insulated fiberglass, 3'-0" x 8'-0", lever and deadbolt; threshold flush with the porch
D2	Dining	French pair	6'-0" x 8'-0"	74.5" x 97.5"	rear ext. wall	2-2×12 with 2" XPS, 2 jacks each end	French doors to the rear patio, 6'-0" x 8'-0" pair, one active leaf, low-E glass
D3	Back hall	prehung swing	3'-0" x 6'-8"	38" x 82.5"	W13	flat 2×4 with cripples (non-bearing)	house to garage: 20-minute rated, solid core, self-closing (IRC R302.5.1); 1-step down to the garage slab
D4	Garage	overhead	16'-0" x 8'-0"	16'-0" x 8'-0" finished, 2x jambs	front ext. wall	3-1/2" x 14" LVL (2 plies 1-3/4"), 3 jacks each end; confirm with the truss reactions	16'-0" x 8'-0" insulated overhead door with opener
D5	Garage	prehung swing	3'-0" x 6'-8"	38.5" x 81.5"	east ext. wall	2-2×6 with 2" XPS (non-bearing: gable end or porch / patio return)	garage service door, steel, 3'-0" x 6'-8"
D6	Bedroom 3	prehung swing	2'-8" x 6'-8"	34" x 82.5"	W6	flat 2×4 with cripples (non-bearing)	
D7	Bedroom 3 closet	bifold	5'-0" x 6'-8"	62" x 82.5"	W6	flat 2×4 with cripples (non-bearing)	2 pair of 2'-6" bifolds
D8	Bath 2	prehung swing	2'-8" x 6'-8"	34" x 82.5"	W8	flat 2×4 with cripples (non-bearing)	privacy lock
D9	Bedroom 2 closet	bifold	5'-0" x 6'-8"	62" x 82.5"	W10	flat 2×4 with cripples (non-bearing)	2 pair of 2'-6" bifolds
D10	Bedroom 2	prehung swing	2'-8" x 6'-8"	34" x 82.5"	W10	flat 2×4 with cripples (non-bearing)	
D11	Mud / laundry	prehung swing	2'-8" x 6'-8"	34" x 82.5"	W12	flat 2×4 with cripples (non-bearing)	
D12	Primary bedroom	prehung swing	2'-8" x 6'-8"	34" x 82.5"	W15	flat 2×4 with cripples (non-bearing)	
D13	Primary bath	prehung swing	2'-8" x 6'-8"	34" x 82.5"	W16	flat 2×4 with cripples (non-bearing)	privacy lock
D14	WIC	prehung swing	2'-6" x 6'-8"	32" x 82.5"	W17	flat 2×4 with cripples (non-bearing)	
D15	Pantry	prehung swing	2'-6" x 6'-8"	32" x 82.5"	W18	flat 2×4 with cripples (non-bearing)	
D16	Mechanical room	prehung swing	2'-8" x 6'-8"	34" x 82.5"	W21	flat 2×4 with cripples (non-bearing)	swings out into the garage, clear of the water heater
O1	Hall	cased opening	3'-6" x 6'-8"	44" x 82.5"	W5	flat 2×4 with cripples (non-bearing)	cased opening, hall to the great room

Window schedule

Low-E, U-0.30 or better (zone 6). Sizes are nominal: confirm the maker's rough openings before framing.

Window	Room	Size (W x H)	Type	Sill / head	Rough opening	In wall	Header
N1	Bedroom 3	3'-0" x 5'-0"	single hung, egress	3'-0" / 8'-0"	36.5" x 60.5"	front ext. wall	2-2×8 with 2" XPS, 1 jack each end
N2	Living room	3'-0" x 5'-0"	single hung	3'-0" / 8'-0"	36.5" x 60.5"	front ext. wall	2-2×8 with 2" XPS, 1 jack each end
N3	Living room	3'-0" x 5'-0"	single hung	3'-0" / 8'-0"	36.5" x 60.5"	front ext. wall	2-2×8 with 2" XPS, 1 jack each end
N4	Bedroom 3	3'-0" x 5'-0"	single hung, egress	3'-0" / 8'-0"	36.5" x 60.5"	west ext. wall	2-2×6 with 2" XPS (non-bearing: gable end or porch / patio return)
N5	Bath 2	2'-0" x 3'-0"	single hung, obscure glass	5'-0" / 8'-0"	24.5" x 36.5"	west ext. wall	2-2×6 with 2" XPS (non-bearing: gable end or porch / patio return)
N6	Bedroom 2	3'-0" x 5'-0"	single hung, egress	3'-0" / 8'-0"	36.5" x 60.5"	west ext. wall	2-2×6 with 2" XPS (non-bearing: gable end or porch / patio return)
N7	Bedroom 2	3'-0" x 5'-0"	single hung, egress	3'-0" / 8'-0"	36.5" x 60.5"	rear ext. wall	2-2×8 with 2" XPS, 1 jack each end
N8	Kitchen	3'-0" x 4'-0"	single hung, over the rear counter	4'-0" / 8'-0"	36.5" x 48.5"	rear ext. wall	2-2×8 with 2" XPS, 1 jack each end
N9	Primary bedroom	3'-0" x 5'-0"	single hung, egress	3'-0" / 8'-0"	36.5" x 60.5"	rear ext. wall	2-2×8 with 2" XPS, 1 jack each end
N10	Primary bath	2'-0" x 3'-0"	single hung, obscure glass	5'-0" / 8'-0"	24.5" x 36.5"	east ext. wall	2-2×6 with 2" XPS (non-bearing: gable end or porch / patio return)
N11	Garage	3'-0" x 4'-0"	single hung	4'-0" / 8'-0"	36.5" x 48.5"	east ext. wall	2-2×6 with 2" XPS (non-bearing: gable end or porch / patio return)

Blocking schedule

2×8 flat between studs unless noted, flush with the stud face.

Tag	Wall	Face	Length	Height	For
B1	W5	east face	4'-0"	30"–72"	TV mount, living room: 2×8 flat between studs, 2 rows
B2	W15	east face	4'-0"	30"–66"	TV mount, primary bedroom
B3	W15	west face	7'-2"	54"–96"	kitchen upper cabinets, wall run: 2×6 continuous band
B4	rear ext. wall	south face	4'-8"	54"–96"	kitchen upper cabinets, rear run, either side of N8
B5	W15	west face	2'-0"	66"–84"	range hood
B6	W9	south face	4'-10"	30"–84"	Bath 2 vanity top, mirror and light
B7	W8	west face	2'-6"	30"–84"	Bath 2 tub: shower valve, grab bar at 33"–36", towel bar
B8	west ext. wall	east face	3'-0"	24"–40"	Bath 2 toilet paper holder and grab bar
B9	W16	east face	5'-5"	30"–84"	primary vanity, mirrors and lights
B10	W17	south face	4'-0"	30"–84"	primary shower: valve, grab bar, glass door hinge jamb, niche
B11	W13	west face	5'-1"	54"–66"	laundry shelf over the washer and dryer
B12	W24	east face	3'-0"	18"–72"	mud bench and coat hooks; carry the band on along wall 11 to 6'-0"
B13	W6	north face	7'-5"	60"–72"	Bedroom 3 closet rod and shelf
B14	W10	south face	7'-5"	60"–72"	Bedroom 2 closet rod and shelf

Tag	Wall	Face	Length	Height	For
B15	rear ext. wall	south face	8'-11"	40"–84"	WIC rods and shelves (double hang on the north wall)
B16	W19	north face	5'-8"	12"–84"	pantry shelves, every 12"

Dimensional lumber and sheathing

Rough-order quantities from the drawing geometry, for pricing. The framer takes off the final list.

Item	Qty	Notes
2×6 × 104-5/8" precut studs (exterior)	260	commons, corners, kings and jacks; +10% waste included in the order
2×4 × 104-5/8" precut studs (interior)	266	commons, kings, jacks; partition backers at every tee
2×6 plates, 1 PT bottom + 2 top	628 lf	about 40 16' boards
2×4 plates, 1 PT bottom + 2 top	610 lf	about 39 16' boards
7/16" OSB wall sheathing, 4×9	47	exterior walls, less openings, +10%
Roof trusses, 6:12 common, 40'-0" span, 24" o.c.	28	12" overhang, raised heel for R-60 at the walls; engineered by the truss supplier
Gable end trusses, 16" o.c. verticals	4	east and west ends, and the fronts of the porch and garage gables; 2×4 gable bracing per the truss drawings
Front gable trusses and valley sets	8	one 18' common over the porch beam, then valley trusses on the main roof sheathing: CG1 10'-11", CG1 6'-11", CG1 2'-11", CG2 14'-11", CG2 10'-11", CG2 6'-11", CG2 2'-11"
Porch and patio: 6×6 posts, 2-2×10 beams, 2×6 rafters	7 posts	porch beam under the porch gable; patio shed from a ledger under the rear eave; post bases on footings
1/2" anchor bolts, 10" embed	45	exterior walls and garage separation at 6' o.c., 12" from ends
Hurricane / uplift ties at each truss	60	H2.5A or as the truss drawings

Drywall estimate

Walls 1/2", ceilings 5/8" (trusses at 24" o.c.). Net of door and window openings.

Item	Qty	Notes
1/2" gypsum, walls	100 sheets 4×12	4271 sq ft net, +12%
5/8" gypsum, ceilings (24" o.c. trusses)	42 sheets 4×12	1,800 sq ft house ceilings, +10%
5/8" Type X, garage ceiling	13 sheets 4×12	garage ceiling under the attic (R302.6); fire-tape
1/2" gypsum, garage side of walls 13 and 14, mech room both sides	15 sheets 4×12	taped (R302.6)
1/2" cement board, tub and shower walls	9 sheets 3×5	Bath 2 tub surround and the primary shower, waterproofed
Moisture-resistant 1/2" board in Bath 2, primary bath, laundry	included in Y1	

Roof framing

Item	Qty	Notes
Common trusses	28 @ 24" o.c.	6:12, 40'-0" clear span bearing on the front walls (1, 25) and the rear walls (3, 26); interior walls are non-bearing, held 1/2" below the bottom chord with partition clips. Over the porch and patio the trusses bear on walls 23 and 28 and cantilever 4' to the eave line (truss designer to confirm, or add a flush beam)
Gable ends	2	east and west, sheathed, 12" rake overhang on outlookers
Front gables	2	CG1 over the porch (18' wide, front on the porch beam) and CG2 over the garage (22' wide, front on wall 25); ridges run north and die into the main roof, valley sets on the main sheathing, ice barrier in both valleys
Attic access	1	22" x 54" insulated pull-down stair in the garage ceiling (F, near wall 14); the way to FAU-1

Item	Qty	Notes
FAU-1 platform	1	3/4" OSB platform over the back hall, 30" service side, catwalk from the access (M1305.1.3)
Attic ventilation	1/300	continuous soffit intake, ridge vent; baffles at every bay
Ceiling insulation	R-60	blown cellulose or fibreglass over the house; R-49 minimum over the garage if it is ever heated