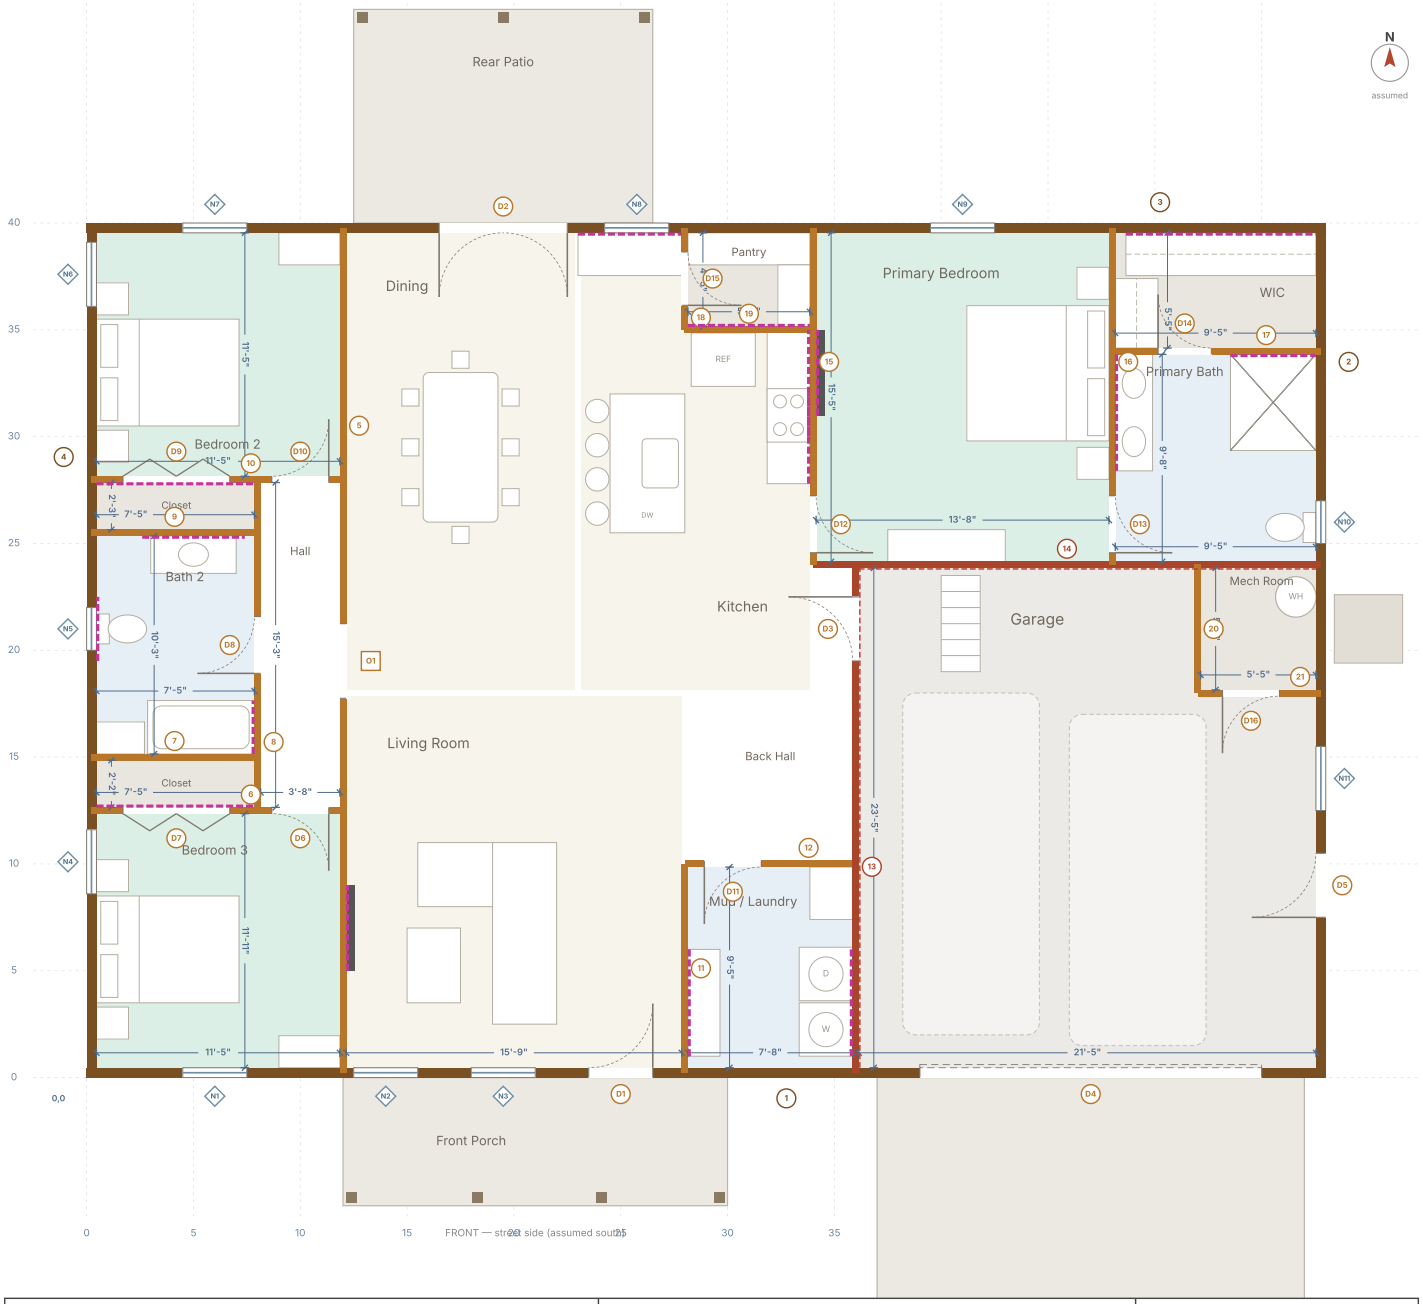


Waring Build

BuildWise plan 3933 · 3 bed, 2 bath · 1,800 sq ft + 528 sq ft garage · 58'-0" x 40'-0" framing
Slab on grade · 9' ceilings · 6:12 gable · grid 5', 0,0 at the south-west corner

Framing plan

Walls, door and window rough openings, headers, blocking
Schematic for pricing and coordination, not a stamped construction document. Verify on site.

S-1

rev
drawn for K. Christianson

S-1 Framing

exterior 2×6 @ 16" 2×4 partition @ 16" garage separation, gypsum on the garage side (red dash) blocking band window (diamond tag)

round tag: door; square tag: cased opening

Notes

1. Plan coordinates: x runs east from the outside face of the west wall framing, y runs north from the outside face of the front wall framing; the grid is 5'. The front of the house is drawn facing south: confirm the lot orientation.
2. Blue dimensions are each room's clear size, stud face to stud face: exterior walls to the inside face of the 2×6 studs, interior walls to the stud face 1-3/4" off the centre line.
3. Ceilings are 9'-0" flat throughout, including the garage, on 104-5/8" precut studs with a PT bottom plate and a double top plate.
4. The roof is a simple 6:12 gable, ridge east–west: trusses clear-span 40' from wall 1 to wall 3, so walls 1 and 3 bear and every interior wall is a partition. Headers in walls 1 and 3 are sized for the truss load; walls 2 and 4 are gable ends.
5. Foundation: slab on grade, thickened edge or frost-protected stem wall to the local frost depth; 10-mil vapour retarder; R-10 under-slab perimeter insulation 4' in (IECC climate zone 6 assumed). Garage slab 4" below the house slab, sloped 1/8"/ft to the door.
6. Garage separation (R302.6): 1/2" gypsum on the garage side of walls 13 and 14, 5/8" Type X on the garage ceiling; D3 is 20-minute rated and self-closing. Seal every penetration in those walls.
7. Door rough openings: prehung interior 2" over the leaf width x 82-1/2"; exterior per the door maker. Window rough openings 1/2" over the unit size; heads at 8'-0".
8. Bedroom windows N1, N4, N6, N7 and N9 are egress windows: 5.7 sq ft clear opening, 20" min width, 24" min height, sill 44" max (R310). Choose a unit size that meets the clear opening.

Open items

The particulars to settle on this sheet.

- Orientation: the drawings assume the porch and garage door face south. Tell us the real compass direction and the sheets will turn.
- Bath 2 is drawn 7'-5" x 10'-2" clear: the BuildWise label says 5' x 11', which does not fit beside the 3'-8" hall. Keep, or rework the bedroom wing?
- Interior door height: 6'-8" drawn. 8'-0" doors suit 9' ceilings better (D6–D16, about $40–$90 more each).
- Primary bedroom door D12 opens off the kitchen corner, as on the plan; the garage keeps its full 22' width. Alternative: shift it to the back-hall alcove and narrow the garage to 21'.
- Front porch and rear patio roofs: shed roofs on 6×6 posts drawn on both, as the elevations show. Confirm the patio is covered.
- Truss heel height and snow load: confirm the site ground snow load for the truss engineering and the bearing-wall headers.

Wall schedule

One row per wall. Click a row to find it on the plan.

Wall	Runs	Length	Framing	Openings	Notes
1	east–west, the front of the house	58'-0"	2×6 @ 16" o.c., 7/16" OSB	N1, N2, N3, D1, D4	front (south) exterior wall; bears the roof trusses
2	north–south, the east gable end	39'-1"	2×6 @ 16" o.c., 7/16" OSB	D5, N11, N10	east exterior wall (gable end)
3	east–west, the rear of the house	58'-0"	2×6 @ 16" o.c., 7/16" OSB	N7, D2, N8, N9	rear (north) exterior wall; bears the roof trusses
4	north–south, the west gable end	39'-1"	2×6 @ 16" o.c., 7/16" OSB	N4, N5, N6	west exterior wall (gable end)
5	north–south, front ext. wall to rear ext. wall; west face 3'-8" from W8	39'-1"	2×4 @ 16" o.c. partition	O1	bedroom wing / great room
6	east–west, west ext. wall to W5; south face 11'-11" from front ext. wall	11'-5"	2×4 @ 16" o.c. partition	D7, D6	Bedroom 3 / its closet and the hall

Wall	Runs	Length	Framing	Openings	Notes
7	east–west, west ext. wall to W8; south face 2'-2" from W6	7'-5"	2×4 @ 16" o.c. partition	—	Bedroom 3 closet / Bath 2
8	north–south, W6 to W10; west face 7'-5" from west ext. wall	15'-2"	2×4 @ 16" o.c. partition	D8	closets and Bath 2 / hall
9	east–west, west ext. wall to W8; south face 10'-3" from W7	7'-5"	2×4 @ 16" o.c. partition	—	Bath 2 / Bedroom 2 closet
10	east–west, west ext. wall to W5; south face 2'-3" from W9	11'-5"	2×4 @ 16" o.c. partition	D9, D10	Bedroom 2 / its closet and the hall
11	north–south, front ext. wall to W12; west face 15'-9" from W5	9'-5"	2×4 @ 16" o.c. partition	—	living room / mud-laundry
12	east–west, W11 to W13; south face 9'-5" from front ext. wall	7'-9"	2×4 @ 16" o.c. partition	D11	mud-laundry / back hall
13	north–south, front ext. wall to W14; west face 23'-8" from W5	23'-5"	2×4 @ 16" o.c., R-13 batts	D3	house / garage
14	east–west, W15 to east ext. wall; south face 23'-5" from front ext. wall	23'-5"	2×4 @ 16" o.c., R-13 batts	—	primary suite / garage and back hall
15	north–south, W14 to rear ext. wall; west face 21'-8" from W5	15'-5"	2×4 @ 16" o.c. partition	D12	primary bedroom / kitchen and pantry
16	north–south, W14 to rear ext. wall; west face 13'-8" from W15	15'-5"	2×4 @ 16" o.c. partition	D13	primary bedroom / primary bath and WIC
17	east–west, W16 to east ext. wall; south face 9'-8" from W14	9'-5"	2×4 @ 16" o.c. partition	D14	primary bath / WIC
18	north–south, W19 to rear ext. wall; west face 15'-9" from W5	4'-5"	2×4 @ 16" o.c. partition	D15	pantry / kitchen
19	east–west, W18 to W15; south face 24'-8" from W12	5'-9"	2×4 @ 16" o.c. partition	—	pantry / kitchen
20	north–south, W21 to W14; west face 15'-8" from W13	5'-9"	2×4 @ 16" o.c., 1/2" gypsum both sides; PT bottom plate	—	mechanical room / garage
21	east–west, W20 to east ext. wall; south face 17'-5" from front ext. wall	5'-5"	2×4 @ 16" o.c., 1/2" gypsum both sides; PT bottom plate	D16	mechanical room / garage

Door schedule

Door	Room	Type	Size	Rough opening	In wall	Header	Notes
D1	Front entry	prehung swing	3'-0" x 8'-0"	38.5" x 97.5"	front ext. wall	2-2×8 with 2" XPS, 1 jack each end	insulated fiberglass, 3'-0" x 8'-0", lever and deadbolt; threshold flush with the porch
D2	Dining	French pair	6'-0" x 8'-0"	74.5" x 97.5"	rear ext. wall	2-2×12 with 2" XPS, 2 jacks each end	French doors to the rear patio, 6'-0" x 8'-0" pair, one active leaf, low-E glass
D3	Back hall	prehung swing	3'-0" x 6'-8"	38" x 82.5"	W13	flat 2×4 with cripples (non-bearing)	house to garage: 20-minute rated, solid core, self-closing (IRC R302.5.1); 1-step down to the garage slab
D4	Garage	overhead	16'-0" x 8'-0"	16'-0" x 8'-0" finished, 2x jambs	front ext. wall	3-1/2" x 14" LVL (2 plies 1-3/4"), 3 jacks each end; confirm with the truss reactions	16'-0" x 8'-0" insulated overhead door with opener
D5	Garage	prehung swing	3'-0" x 6'-8"	38.5" x 81.5"	east ext. wall	2-2×6 with 2" XPS (gable end, non-bearing)	garage service door, steel, 3'-0" x 6'-8"
D6	Bedroom 3	prehung swing	2'-8" x 6'-8"	34" x 82.5"	W6	flat 2×4 with cripples (non-bearing)	
D7	Bedroom 3 closet	bifold	5'-0" x 6'-8"	62" x 82.5"	W6	flat 2×4 with cripples (non-bearing)	2 pair of 2'-6" bifolds
D8	Bath 2	prehung swing	2'-8" x 6'-8"	34" x 82.5"	W8	flat 2×4 with cripples (non-bearing)	privacy lock

Door	Room	Type	Size	Rough opening	In wall	Header	Notes
D9	Bedroom 2 closet	bifold	5'-0" x 6'-8"	62" x 82.5"	W10	flat 2×4 with cripples (non-bearing)	2 pair of 2'-6" bifolds
D10	Bedroom 2	prehung swing	2'-8" x 6'-8"	34" x 82.5"	W10	flat 2×4 with cripples (non-bearing)	
D11	Mud / laundry	prehung swing	2'-8" x 6'-8"	34" x 82.5"	W12	flat 2×4 with cripples (non-bearing)	
D12	Primary bedroom	prehung swing	2'-8" x 6'-8"	34" x 82.5"	W15	flat 2×4 with cripples (non-bearing)	
D13	Primary bath	prehung swing	2'-8" x 6'-8"	34" x 82.5"	W16	flat 2×4 with cripples (non-bearing)	privacy lock
D14	WIC	prehung swing	2'-6" x 6'-8"	32" x 82.5"	W17	flat 2×4 with cripples (non-bearing)	
D15	Pantry	prehung swing	2'-6" x 6'-8"	32" x 82.5"	W18	flat 2×4 with cripples (non-bearing)	
D16	Mechanical room	prehung swing	2'-8" x 6'-8"	34" x 82.5"	W21	flat 2×4 with cripples (non-bearing)	swings out into the garage, clear of the water heater
O1	Hall	cased opening	3'-6" x 6'-8"	44" x 82.5"	W5	flat 2×4 with cripples (non-bearing)	cased opening, hall to the great room

Window schedule

Low-E, U-0.30 or better (zone 6). Sizes are nominal: confirm the maker's rough openings before framing.

Window	Room	Size (W x H)	Type	Sill / head	Rough opening	In wall	Header
N1	Bedroom 3	3'-0" x 5'-0"	single hung, egress	3'-0" / 8'-0"	36.5" x 60.5"	front ext. wall	2-2×8 with 2" XPS, 1 jack each end
N2	Living room	3'-0" x 5'-0"	single hung	3'-0" / 8'-0"	36.5" x 60.5"	front ext. wall	2-2×8 with 2" XPS, 1 jack each end
N3	Living room	3'-0" x 5'-0"	single hung	3'-0" / 8'-0"	36.5" x 60.5"	front ext. wall	2-2×8 with 2" XPS, 1 jack each end
N4	Bedroom 3	3'-0" x 5'-0"	single hung, egress	3'-0" / 8'-0"	36.5" x 60.5"	west ext. wall	2-2×6 with 2" XPS (gable end, non-bearing)
N5	Bath 2	2'-0" x 3'-0"	single hung, obscure glass	5'-0" / 8'-0"	24.5" x 36.5"	west ext. wall	2-2×6 with 2" XPS (gable end, non-bearing)
N6	Bedroom 2	3'-0" x 5'-0"	single hung, egress	3'-0" / 8'-0"	36.5" x 60.5"	west ext. wall	2-2×6 with 2" XPS (gable end, non-bearing)
N7	Bedroom 2	3'-0" x 5'-0"	single hung, egress	3'-0" / 8'-0"	36.5" x 60.5"	rear ext. wall	2-2×8 with 2" XPS, 1 jack each end
N8	Kitchen	3'-0" x 4'-0"	single hung, over the rear counter	4'-0" / 8'-0"	36.5" x 48.5"	rear ext. wall	2-2×8 with 2" XPS, 1 jack each end
N9	Primary bedroom	3'-0" x 5'-0"	single hung, egress	3'-0" / 8'-0"	36.5" x 60.5"	rear ext. wall	2-2×8 with 2" XPS, 1 jack each end
N10	Primary bath	2'-0" x 3'-0"	single hung, obscure glass	5'-0" / 8'-0"	24.5" x 36.5"	east ext. wall	2-2×6 with 2" XPS (gable end, non-bearing)
N11	Garage	3'-0" x 4'-0"	single hung	4'-0" / 8'-0"	36.5" x 48.5"	east ext. wall	2-2×6 with 2" XPS (gable end, non-bearing)

Blocking schedule

2×8 flat between studs unless noted, flush with the stud face.

Tag	Wall	Face	Length	Height	For
B1	W5	east face	4'-0"	30"–72"	TV mount, living room: 2×8 flat between studs, 2 rows
B2	W15	east face	4'-0"	30"–66"	TV mount, primary bedroom
B3	W15	west face	7'-2"	54"–96"	kitchen upper cabinets, wall run: 2×6 continuous band

Tag	Wall	Face	Length	Height	For
B4	rear ext. wall	south face	4'-10"	54"–96"	kitchen upper cabinets, rear run, either side of N8
B5	W15	west face	2'-0"	66"–84"	range hood
B6	W9	south face	4'-10"	30"–84"	Bath 2 vanity top, mirror and light
B7	W8	west face	2'-6"	30"–84"	Bath 2 tub: shower valve, grab bar at 33"–36", towel bar
B8	west ext. wall	east face	3'-0"	24"–40"	Bath 2 toilet paper holder and grab bar
B9	W16	east face	5'-5"	30"–84"	primary vanity, mirrors and lights
B10	W17	south face	4'-0"	30"–84"	primary shower: valve, grab bar, glass door hinge jamb, niche
B11	W13	west face	5'-1"	54"–66"	laundry shelf over the washer and dryer
B12	W11	east face	5'-0"	18"–72"	mud bench and coat hooks
B13	W6	north face	7'-5"	60"–72"	Bedroom 3 closet rod and shelf
B14	W10	south face	7'-5"	60"–72"	Bedroom 2 closet rod and shelf
B15	rear ext. wall	south face	8'-11"	40"–84"	WIC rods and shelves (double hang on the north wall)
B16	W19	north face	5'-8"	12"–84"	pantry shelves, every 12"

Dimensional lumber and sheathing

Rough-order quantities from the drawing geometry, for pricing. The framer takes off the final list.

Item	Qty	Notes
2×6 × 104-5/8" precut studs (exterior)	220	commons, corners, kings and jacks; +10% waste included in the order
2×4 × 104-5/8" precut studs (interior)	276	commons, kings, jacks; partition backers at every tee
2×6 plates, 1 PT bottom + 2 top	583 lf	about 37 16' boards
2×4 plates, 1 PT bottom + 2 top	652 lf	about 41 16' boards
7/16" OSB wall sheathing, 4×9	43	exterior walls, less openings, +10%
Roof trusses, 6:12 common, 40'-0" span, 24" o.c.	28	12" overhang, raised heel for R-60 at the walls; engineered by the truss supplier
Gable end trusses, 16" o.c. verticals	2	east and west ends; 2×4 gable bracing per the truss drawings
Porch and patio: 6×6 posts, 2-2×10 beams, 2×6 rafters	7 posts	shed roofs tied into the main truss tails; post bases on footings
1/2" anchor bolts, 10" embed	45	exterior walls and garage separation at 6' o.c., 12" from ends
Hurricane / uplift ties at each truss	60	H2.5A or as the truss drawings

Drywall estimate

Walls 1/2", ceilings 5/8" (trusses at 24" o.c.). Net of door and window openings.

Item	Qty	Notes
1/2" gypsum, walls	103 sheets 4×12	4389 sq ft net, +12%
5/8" gypsum, ceilings (24" o.c. trusses)	42 sheets 4×12	1,800 sq ft house ceilings, +10%
5/8" Type X, garage ceiling	13 sheets 4×12	garage ceiling under the attic (R302.6); fire-tape
1/2" gypsum, garage side of walls 13 and 14, mech room both sides	15 sheets 4×12	taped (R302.6)
1/2" cement board, tub and shower walls	9 sheets 3×5	Bath 2 tub surround and the primary shower, waterproofed
Moisture-resistant 1/2" board in Bath 2, primary bath, laundry	included in Y1	

Roof framing

Item	Qty	Notes
Common trusses	28 @ 24" o.c.	6:12, 40'-0" clear span bearing on walls 1 and 3; interior walls are non-bearing, held 1/2" below the bottom chord with partition clips
Gable ends	2	east and west, sheathed, 12" rake overhang on outlookers
Attic access	1	22" x 54" insulated pull-down stair in the garage ceiling (F, near wall 14); the way to AH-1
AH-1 platform	1	3/4" OSB platform over the back hall, 30" service side, catwalk from the access (M1305.1.3)
Attic ventilation	1/300	continuous soffit intake, ridge vent; baffles at every bay
Ceiling insulation	R-60	blown cellulose or fibreglass over the house; R-49 minimum over the garage if it is ever heated